

Installation Instructions for:

VOYAGER ROOF RACK:

JEEP GRAND CHEROKEE
2011-present

Thank you for your recent purchase. Attached you will find install instructions for your new Grand Cherokee Voyager Rack. It is fairly simple, and shouldn't take more than 30 minutes, however should you need assistance after hours, please TEXT 941 421 9300, or email info@voyageroffroad.com and we will get back to you as quickly as possible.

TOOLS NEEDED: Trim Tool or Flat Head Screwdriver, 3/8 Ratchet, 13mm wrench/socket, 14mm wrench/socket, Rubber Mallet, Flat Head Screw Driver

Quick Install Guide (see page 2+ for detailed guide):

- 1: Remove "stock" roof rack. Be VERY CAREFUL with the stock roof hardware that is "permanent" to the vehicle, it will be reused.
- 2: Identify left and right mounting rails and install – one side rests on the rubber rail, and one over the roof hardware. Slide and lock into place.
- 3: Install "L" brackets from front to rear – They are numbered, I, II, III, IIII– Install #1 to the front of the vehicle, working to the rear using #4. Tighten.
- 4: Install washers onto rail. Tighten
- 5: Install Basket to Rails using 3/8's hardware (Bolt, lockwasher, flatwasher, through hole, with flat washer and nut on backside.
6. Install trim between rack and roof
7. Enjoy




Step 1: Remove stock rack

Step 2: Slide and Lock Side Rails into Place



Step 3: Install washers and L Brackets, they are numbered, I, II, III, IIII– Install #1 to the front of the vehicle, working to the rear using #4. Tighen.

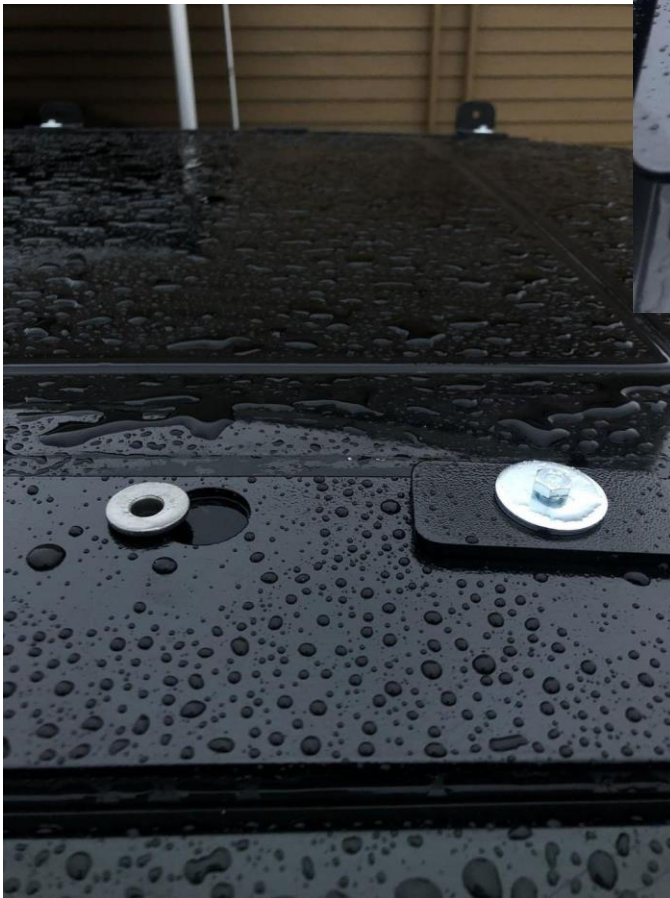



Step 4: Install Basket to Rails using 3/8's hardware (Bolt, lockwasher, flatwasher, through hole, with flat washer and nut on backside.



All done! Thank you for your purchase. If you have installation questions, please email info@voyageroffroad.com and we will get back to you as soon as we can.

Cheers!

VOYAGER

